


RIPASSO

If you are looking for elegance and a touch of luxury, our new Ripasso Translucent Collection is the perfect choice. The fabric is available in beautiful designer colors and comes in a 25 mm cell size.

TRANSLUCENT 


ALSO AVAILABLE AS BLACKOUT 

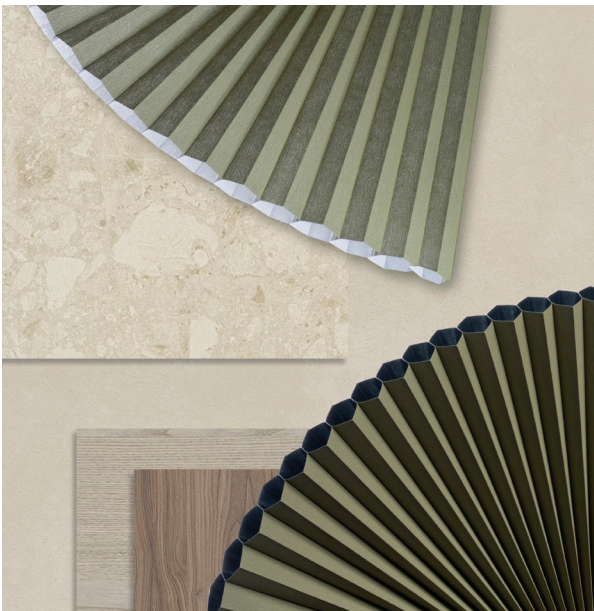

GENERAL INFORMATION

Number of Colors	10	
Material Composition	100% Polyester	
Width	300 cm	118.00 in
Thickness (+/- 5%)	0,18 mm	0.0070 in
Weight (+/- 5%)	160 gr/m ²	4.71 oz/yd ²

25 = Available in 25 mm (3/8 inch) cell size

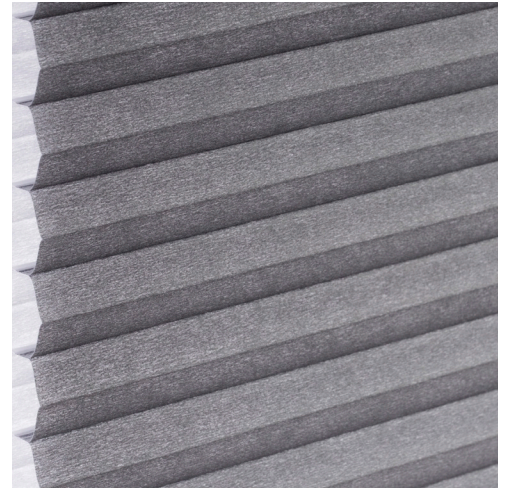

SPECIAL VALUES

Color Fastness to Light	4 - 5
Transparency	Translucent
PVC Free	Yes
Lead Free	Yes
Halogen Free	Yes

Formaldehyde Free	Yes
Phthalates Free	Yes
Suitable for Workstations	Yes
Manufacturing Procedure	Cold Cut

SUITABLE FOR



Honeycomb

CARE & HANDLING

Remove dust with vacuum cleaner or compressed air. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge, soft brush or cloth. Leave the blind down until completely dry.

Version 20251204

THERMAL AND VISUAL PROPERTIES | DIN EN 410, EN ISO 52022-1, DIN EN 14501

Item Number	Color	Rs	Ts	As	Rv	Tv	Av	Tuv
85511	White	65,16%	26,70%	8,14%	66,30%	26,87%	6,83%	23,30%
85512	Ivory	68,16%	23,49%	8,35%	70,10%	23,25%	6,65%	16,20%
85514	Light Gray	67,47%	17,41%	15,12%	68,20%	15,07%	16,73%	11,30%
85521	Mid Gray	61,32%	10,72%	27,96%	61,70%	7,54%	30,76%	6,00%
85522	Dark Gray	59,03%	6,25%	34,72%	60,10%	5,02%	34,88%	4,00%
85523	Black	58,97%	3,42%	37,61%	60,10%	3,24%	36,66%	2,70%

Rs = Solar Reflection **Tv** = Light Transmittance **Ts** = Solar Transmittance
Rv = Light Reflection **Av** = Light Absorption **As** = Solar Absorption
TUV = Ultraviolet Transmittance

Item Number	Color	Glass type C			Glass type E			Glass type F			Glass type G		
		$U_g = 1,2 \text{ W}/(\text{m}^2\text{K})$ $g=0,59$			$U_g = 0,8 \text{ W}/(\text{m}^2\text{K})$ $g=0,55$			$U_g = 1.1 \text{ W}/(\text{m}^2\text{K})$ $g=0,64$			$U_g = 1.0 \text{ W}/(\text{m}^2\text{K})$ $g=0,33$		
		Gtot	Gtot Class	Fc	Gtot	Gtot Class	Fc	Gtot	Gtot Class	Fc	Gtot	Gtot Class	Fc
85511	White	0,3613	1	0,6124	0,3517	1	0,6395	0,3713	1	0,5801	0,2582	2	0,7823
85512	Ivory	0,3508	1	0,5946	0,3426	2	0,6230	0,3589	1	0,5608	0,2549	2	0,7724
85514	Light Gray	0,3517	1	0,5961	0,3437	2	0,6250	0,3602	1	0,5628	0,2549	2	0,7725
85521	Mid Gray	0,3702	1	0,6275	0,3605	1	0,6555	0,3825	1	0,5977	0,2602	2	0,7886
85522	Dark Gray	0,3766	1	0,6384	0,3665	1	0,6663	0,3904	1	0,6099	0,2620	2	0,7940
85523	Black	0,3762	1	0,6376	0,3662	1	0,6659	0,3899	1	0,6093	0,2618	2	0,7933

Gtot Value = The total transmission value of solar energy through a combination of window and sun protection
FC-Value = Reduction factor (from 0-1) of the fabric concerning solar energy
Glass type C = Double glazing, with low emissivity and argon cavity
Glass type E = Triple glazing with low emissivity and argon cavity
Glass type F = Double glazing with low-emissivity coating on position 3, with 90% argon-filled spacer
Glass type G = Solar control glazing with 90% argon-filled spacer

COLORS




85511-25
White




85512-25
Ivory




85514-25
Light Gray



85521-25
Mid Gray



85522-25
Dark Gray




85523-25
Black



85524-25
Green



85525-25
Yellow



85526-25
Red



85527-25
Taupe