

ROMA

Roma is a sophisticated textured fabric that perfectly balances contemporary trends with classic traditional design. Its natural, organic color palette highlights the inherent beauty of this expertly woven fabric, making it a stunning choice for any interior.

TRANSPARENT




ALSO AVAILABLE AS BLACKOUT



GENERAL INFORMATION

Number of Colors	7	
Material Composition	100% Polyester	
Width	300 cm	118 in
Thickness (+/- 10%)	0,60 mm	0.0236 in
Weight (+/- 10%)	225 gr/m ²	7.93 oz/yd ²
Roll Length	30 m	32.81 yd

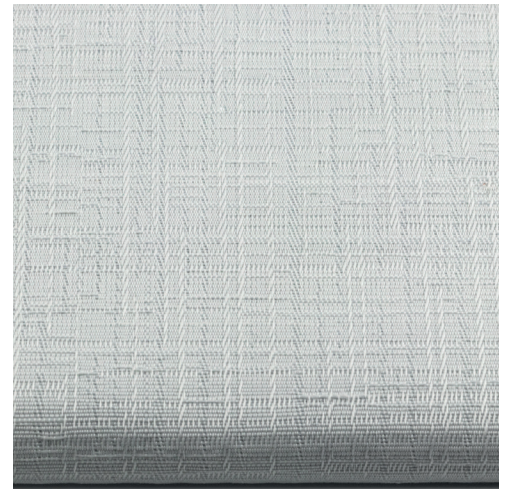

SPECIAL VALUES

Color Fastness to Light	6-7 (DIN ISO 105-B02)
Finish	Acrylic Foam Coating
PVC Free	Yes
Lead Free	Yes
Halogen Free	Yes
Formaldehyde Free	Yes

Phthalates Free	Yes
Humid Environment	Yes
Suitable for Workstations	No
Manufacturing Procedure	Cold Cutting / Laser Cutting
Care Instructions	Damp Cloth

SUITABLE FOR



Roller



Panel

CARE & HANDLING

Remove dust with vacuum cleaner or compressed air. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge, soft brush or cloth. Leave the blind down until completely dry.

Version 20250710



THERMAL AND VISUAL PROPERTIES | DIN EN 410, EN ISO 52022-1, DIN EN 14501


Item Number	Color	Rs	Ts	As	Rv	Tv	Av	Tuv
83000 - 300	Ice White	54,85%	39,57%	5,58%	57,60%	39,76%	2,64%	25,80%
83001 - 300	Off White	55,42%	38,45%	6,13%	58,50%	39,05%	2,45%	21,10%
83002 - 300	Brindle	34,08%	22,10%	43,82%	32,70%	19,07%	48,23%	11,50%
83003 - 300	Espresso	27,05%	16,34%	56,61%	28,10%	15,25%	56,65%	9,50%
83004 - 300	Hickory	24,65%	16,52%	58,83%	24,20%	14,72%	61,08%	10,10%
83005 - 300	Slate	25,32%	16,19%	58,49%	23,90%	13,96%	62,14%	9,80%
83006 - 300	Pebble Stone	30,77%	22,80%	46,43%	30,20%	20,63%	49,17%	13,70%

Rs = Solar Reflection **Tv** = Light Transmittance **Ts** = Solar Transmittance
Rv = Light Reflection **Av** = Light Absorption **As** = Solar Absorption
TUV = Ultraviolet Transmittance

Item Number	Color	Glass type C			Glass type E			Glass type F			Glass type G		
		U _g = 1,2 W/(m ² K) g=0,59			U _g = 0,8 W/(m ² K) g=0,55			U _g = 1.1 W/(m ² K) g=0,64			U _g = 1.0 W/(m ² K) g=0,33		
		Gtot	Gtot Class	Fc	Gtot	Gtot Class	Fc	Gtot	Gtot Class	Fc	Gtot	Gtot Class	Fc
82000 - 300	Ice White	0,3978	1	0,6742	0,3833	1	0,6969	0,4141	1	0,6470	0,2697	2	0,8172
82001 - 300	Off White	0,3957	1	0,6707	0,3815	1	0,6936	0,4116	1	0,6431	0,2690	2	0,8151
82002 - 300	Brindle	0,4614	1	0,7821	0,4406	1	0,8012	0,4905	1	0,7664	0,2882	2	0,8734
82003 - 300	Espresso	0,4830	1	0,8186	0,4601	1	0,8365	0,5164	0	0,8069	0,2945	2	0,8925
82004 - 300	Hickory	0,4908	1	0,8319	0,4670	1	0,8491	0,5257	0	0,8214	0,2969	2	0,8997
83005 - 300	Slate	0,4886	1	0,8281	0,4651	1	0,8455	0,5230	0	0,8173	0,2962	2	0,8976
83006 - 300	Pebble Stone	0,4724	1	0,8006	0,4503	1	0,8187	0,5035	0	0,7866	0,2915	2	0,8835

Gtot Value = The total transmission value of solar energy through a combination of window and sun protection
FC-Value = Reduction factor (from 0-1) of the fabric concerning solar energy
Glass type C = Double glazing, with low emissivity and argon cavity
Glass type E = Triple glazing with low emissivity and argon cavity
Glass type F = Double glazing with low-emissivity coating on position 3, with 90% argon-filled spacer
Glass type G = Solar control glazing with 90% argon-filled spacer


COLORS




83000-300
White




83001-300
Off-white




83002-300
Brindle



83003-300
Espresso



83004-300
Hickory



83005-300
Slate



83006-300
Pebble Stone

Scan the QR-code for more information



Roma Transparent

Version 20250710